

Sample card fabric expansion joints

RUBBERS

SOUNSTOP BLACK VINYL - N°114

CLASS: ● TIGHTNESS ● ACOUSTICAL

Description: Flexible sound isolation material based on Vinyl

Application: Sound absorption layer

Weight (g/m²)	5000	Shore	90
Thickness (mm)	2,55	Tensile strength (Mpa)	>10
Temperature (°C)	90	Remarks	Color: black

RUBBERS

EPDM 1,5 mm - N°58

CLASS: ● TIGHTNESS

Description: EPDM-rubber without supporting layer

Application: Very good aging, ozon, UV, weather resistance. Joint for water, air & gas

Weight (g/m²)	3325	Shore	65
Thickness (mm)	1,5	Tensile strength (Mpa)	>10
Temperature (°C)	110	Remarks	Also available in 3 and 4 mm thickness

RUBBERS

HYPALON 1,5 mm - N°65

CLASS: ● TIGHTNESS

Description: CSM-rubber without supporting layer

Application: Very good aging, ozon, UV, weather resistance. Joint for acids, alkalis & chemicals


Weight (g/m²)	3400	Shore	65
Thickness (mm)	1,5	Tensile strength (Mpa)	>10
Temperature (°C)	90	Remarks	Also available in 3 mm thickness

Contact

DEKOMTE BENELUX BVBA

Simon Stevinstraat 8 | 8400 Oostende - Belgium | T +32 (0) 59 51 07 55 | F +32 (0) 59 51 07 87 | E info@dekomte.be



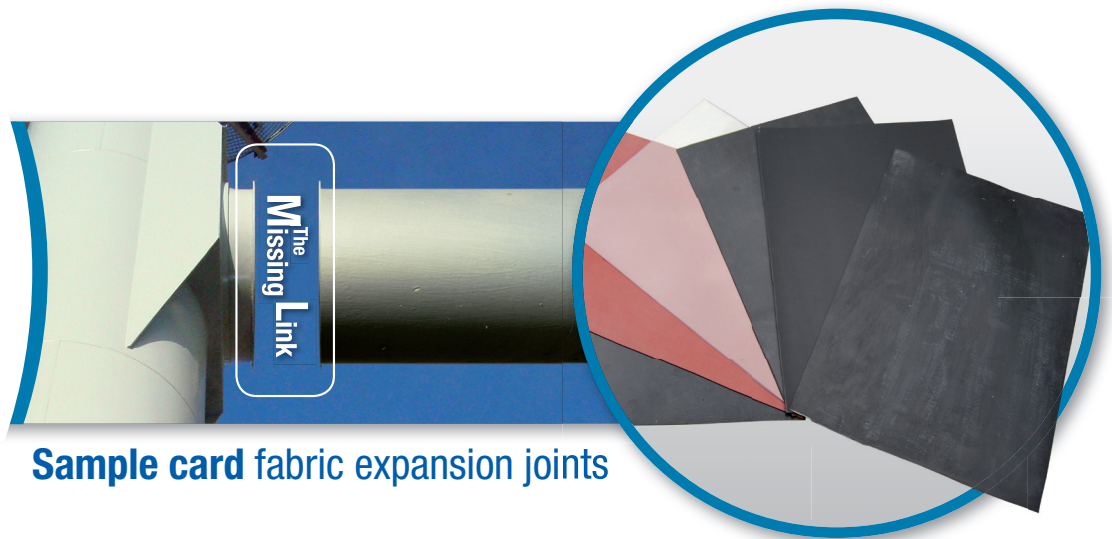

Sample card fabric expansion joints

RUBBERS

DEKO-PUR 1 MM TRANSPARANT - N°110

CLASS: ● TIGHTNESS ● FDA

Description: Extruded thermoplastic polyuretane PU ether film

Application: Tightness layer with very good abrasion and mechanical properties

Weight (g/m²)	1160	Shore	85
Thickness (mm)	1	Tensile strength (Mpa)	500 x 500 (N/cm)
Temperature (°C)	90	Remarks	Also available in black or other thicknesses

RUBBERS

SILICONE 1,5 mm - N°60

CLASS: ● TIGHTNESS

Description: Red silicone SI-rubber without supporting layer

Application: Very good aging, ozon, UV, weather & fire resistance. Joint for air & gas

Weight (g/m²)	2020	Shore	65
Thickness (mm)	1,5	Tensile strength (Mpa)	>10
Temperature (°C)	180	Remarks	Also available in 1 and 3 mm thickness

RUBBERS

VITON 1,5 mm - N°63

CLASS: ● TIGHTNESS

Description: FKM-rubber without supporting layer

Application: Very good aging, ozon, UV, weather resistance. Joint for acid, alkalis, solvents & oil

Weight (g/m²)	3325	Shore	75
Thickness (mm)	1,5	Tensile strength (Mpa)	9
Temperature (°C)	180	Remarks	Also available in 1 mm thickness

Contact

DEKOMTE BENELUX BVBA

Simon Stevinstraat 8 | 8400 Oostende - Belgium | T +32 (0) 59 51 07 55 | F +32 (0) 59 51 07 87 | E info@dekomte.be

